

ASTM D7078 V-Notched Rail Shear Testing Method of CFRP


Applications:

The compression ASTM D7078 is commonly used for:

- » Aerospace and defense composite material qualification
- » Automotive structural composite evaluation
- » Research and development of laminated thermoset and thermoplastic composites

It is applicable to:

- » Unidirectional or multidirectional laminate composites
- » Carbon fiber, glass fiber, aramid fiber, and hybrid fibers
- » Specimens with or without woven reinforcements

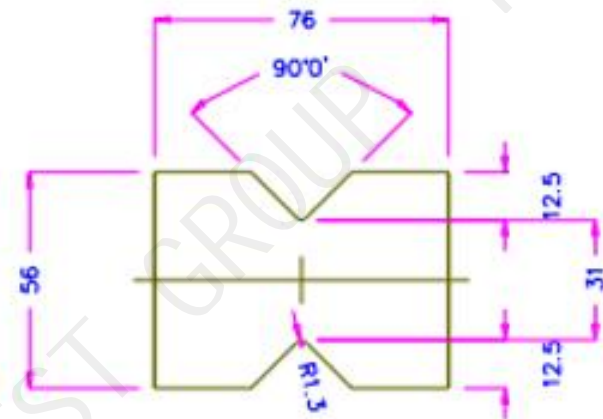

Parameter:

Model	HST-ZJB204F
Standards	ASTM D7078, GB/T28889
Capacity	20kN
Specimen type	Fiber reinforced composite material
Specimen size(LxWxT)	76x56 × (0~10) mm
Temperature(°C)	-70~350

